


DS-KH8350-TE1

Network Indoor Station

HIKVISION[®]

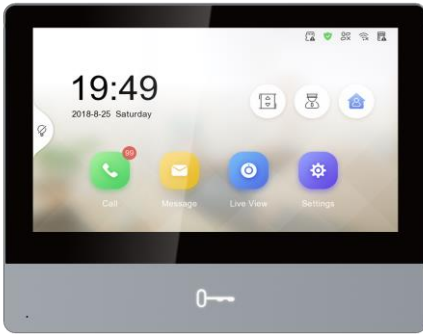

Key Feature

- Premium tempered glass
- Aerospace-grade aluminum
- New UI V2.0: User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- 8.6 mm Ultra-slim design

Specification

Display parameters	
Size	7-inch
Operation method	Capacitive touch screen, physical button
Type	Colorful IPS screen
Video parameters	
Lens	/
FOV	/
Pixel	/
Audio parameters	
Audio quality	Noise suppression and echo cancellation
Network parameters	
Communication protocol	TCP/IP, SIP, RTSP
Wired network	10/100 Mbps self-adaptive
Wi-Fi	/
Bluetooth	Not supported.
Zigbee	/
Device interfaces	
Network interface	1 RJ-45 10/100 Mbps self-adaptive

Power interface	1
General	
Button	1
Installation	Surface mounting
Indicator	/
Weight	With package: 786 g Without package: 600 g
Protective level	/
Power supply method	IEEE802.3af, standard PoE 12 VDC/1 A
Working temperature	-10 ° C to 55 ° C (14 ° F to 131 ° F)
Working humidity	10% to 90%
Dimensions	180 mm × 140 mm × 22.4 mm (7.09" × 5.51" × 0.88")
Battery	/
Application environment	Indoor
Power consumption	≤ 7 W
Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Portuguese, Slovak

Available Model

DS-KH8350-TE1

Accessory

Optional

DS-KD9613-FE6 Facial Door Station	DS-KD8003- IME1/Flush KD8 Series Pro Modular Door Station	DS-KD8003-IME1 KD8 Series Pro Modular Door Station
		

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

