

CCTV IP / Professional IP cameras


SF-IPB585ZA-4I1-0722

SF-IPB585ZA-4I1-0722

I1 Range: Advanced Artificial Intelligence and video metadata

The I1 series is the highest performing IP camera range in the Safire Smart ecosystem. This series integrates advanced and comprehensive artificial intelligence that achieves an accuracy rate of 99%, one of the highest in the industry. In addition, it includes functionalities such as facial capture or video metadata analysis for feature extraction (up to 13 human, 5 vehicle and 2 two-wheeled vehicle features). In this series, cameras with different resolutions (4MP and 8MP) are available with different features to adjust with the best functionalities to the needs and characteristics of each installation.

- Bullet IP camera range I1 AI Advanced
- Resolution 4 Megapixel (2592 x 1520)
- Motorized Lens 7-22 mm | Audio | IR 100m
- Advanced AI: Perimeter, Facial, Counting, Metadata
- Waterproofing IP67 | PoE (IEEE802.3af) | Alarm

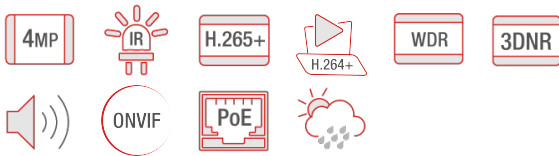

Technical Specification

Camera	
Image Sensor	1 / 3 "CMOS
Image Size	2592 × 1520
Electronic Shutter	1 / 2 s ~ 1 / 100000 s
Iris Type	DC Iris
Min. Illumination	0.005 lux@F1.6,AGC ON;0 lux with IR
Lens	2.8~12mm@F1.3, H.FoV: 100.0°~ 28.9°; V.Fov: 54.5°~16.7°; D.FoV: 104.8°~33.1° ----- 7~22mm@F1.6, H.FoV: 43°~18°; V.Fov: 25°~11°; D.FoV: 50°~20°
Focus	Motorized
Lens Mount	□14
Day & Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
S/N Ratio	≥50dB
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°
Image	
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	4MP (2592 × 1520), 2K (2560 × 1440), 3MP (2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream	4MP/2K/3MP/1080P(60Hz : 1 ~ 30fps; 50Hz: 1~25fps) HFR mode: 1080P/720P(60Hz : 1 ~ 60fps; 50Hz: 1~50fps)
Sub Stream	720P/D1/CIF/480×240 (60Hz : 1 ~ 30fps; 50Hz: 1~25fps)
Third Stream	D1/CIF/480×240 (60Hz : 1 ~ 30fps; 50Hz: 1~25fps)
Bit Rate	64 Kbps ~ 8 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser

ROI	Each ROI to be configured separately
Interfaces	
Network	RJ 45 10M/100M self-adaptive Ethernet port
Video Output	CVBS output (BNC × 1)
Audio	1CH audio input; 1CH audio output
Storage	Built-in micro SD card slot; up to 256GB
Reset	Yes
Alarm	1CH alarm input; 1CH alarm output

Functions	
Remote Monitoring	Web Client/NVR/NVMS2.0/Mobile APP
Web Browser	IE11(plug-in required)/Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, RTMP, HTTP, 802.1x, UPnP, HTTPS, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, sensor detection, SD card error, SD card full, IP address conflict, cable disconnection
General Function	Watermark, video mask, heartbeat, image distortion correction, corridor pattern
Security	Video encryption, firmware encryption, HTTPs encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/HTTPs
PoE	Yes , IEEE802.3af
IR Distance	50 ~ 70 m 70 ~ 100 m
Protection Grade	IP67

Intelligent Analytics (Smart Events)	
Perimeter Protection	Line crossing, region entrance/exiting/intrusion (human/motor vehicle/ non-motor vehicle classification)
Statistics	Target counting by line/area, heat map
Exception Detection	Scene change, video blur and abnormal color detection
Face Detection	Face detection and face capture
Video Metadata	Simultaneously captures human body, motor vehicle and non-motor vehicle and extracts 13 human features, 5 motor vehicle features and 1 non-motor vehicle feature
Other Events	Abandoned/missing object detection

DORI Distance	
Lens	2.8~12mm(W) 2.8~12mm(T) 7~22mm(W) 7~22mm(T)

Detect	58.91m(193.27 ft) 205.99m(675.82ft) 137.13m(449.90ft) 315.72m(1035.82ft)
Observe	23.56m(77.29 ft) 82.40m(270.34ft) 54.85m(179.95ft) 126.29m(414.33ft)
Recognize	11.78m(38.64 ft) 41.20m(135.17ft) 27.43m(89.99ft) 63.14m(207.15ft)
Identify	5.89m(19.32ft) 20.60m(67.58ft) 13.71m(44.98ft) 31.57m(103.57ft)
Others	
Power Supply	DC12V/PoE
Power Consumption	< 9W
Storage Conditions	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	278.3 × 100.2 × 88.7
Weight (net)	Approx. 1.04KG
Installation	Ceiling mounting; wall mounting
Certificate	CE, FCC
Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)